

# 1-1/2" Self-Priming Chemical Pumps

**NO MOTOR**



Model 3890-98  
Stainless Steel

**NO MOTOR**




Model 3890-97  
Bronze

- Available in: Bronze or 300 Series Investment Cast Stainless Steel Construction with Stainless Steel Impeller
- Viton® or Teflon® Mechanical Seal and O-Ring – Depending on Model
- Dual Volute Design
- 1-1/2" NPT Suction and Discharge Ports
- Maximum Temperature
  - ♦ Bronze 200° F
  - ♦ Stainless Steel 250° F
- Maximum Flow 132 GPM
- Maximum Head 63 Ft.
- Self-Priming to 6 Ft.
- Self-Cleaning, Semi-Open Impeller

AMT Self-Priming 300 Series Stainless Steel or Bronze Centrifugal pumps are designed for a wide range of applications including chemical processes, waste water treatment and pumping agriculture fertilizers/fumigants.

300 Series Stainless Steel models are fitted with Teflon® mechanical seal and o-ring, while bronze models come standard with Viton® mechanical seal and o-ring. Pumps are self-priming to 6 feet. Pumps are designed to handle liquids with specific gravities up to 1.3 and viscosities to 100 SSU.

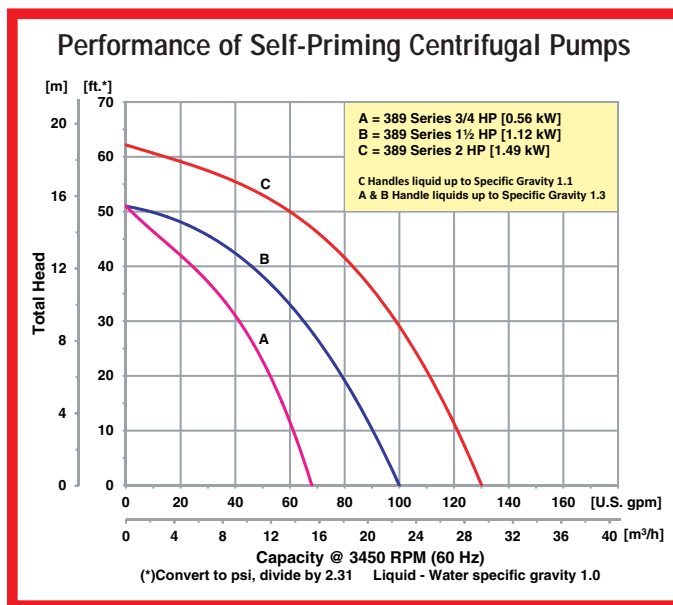

To order, visit  
<http://www.pumpstoreusa.com/store/pedestalpumps/>  
 or call 515-223-4144

## Pump Dimensional & Specification Data

Model ‡	Curve	HP	PH	ENC	Voltage @ 60 Hz +	Full Load Amps	SUC*	DIS*	L**	W**	H	‡ Ship Wt. (Lbs.)
<b>3899</b>	C	2	-	PED	-	-	1½	1½	13.4 [34.0]	6.5 [16.5]	9.5 [24.1]	34

(\*) Standard NPT (Female) pipe thread.

(\*\*) This dimension may vary due to motor manufacturer's specifications.

(+) 3-Phase models can also operate on 50 Hz (This will change full load amps and service factor, RPM and priming capabilities).


NOTE: Dimensions are in inches (centimeters) and have a tolerance of ± 1/4".

NOTE: Electric supply for ALL motors must be within ±10% of nameplate voltage rating (e.g. 230V ±10%= 207 to 253).

‡ Add Suffix -97 or -98 for Specific Model (Ex. 3890-97)

(-97) Cast Bronze Construction with Stainless Steel Impeller and Viton® Seals

(-98) Cast Stainless Steel Construction with Teflon® Seals

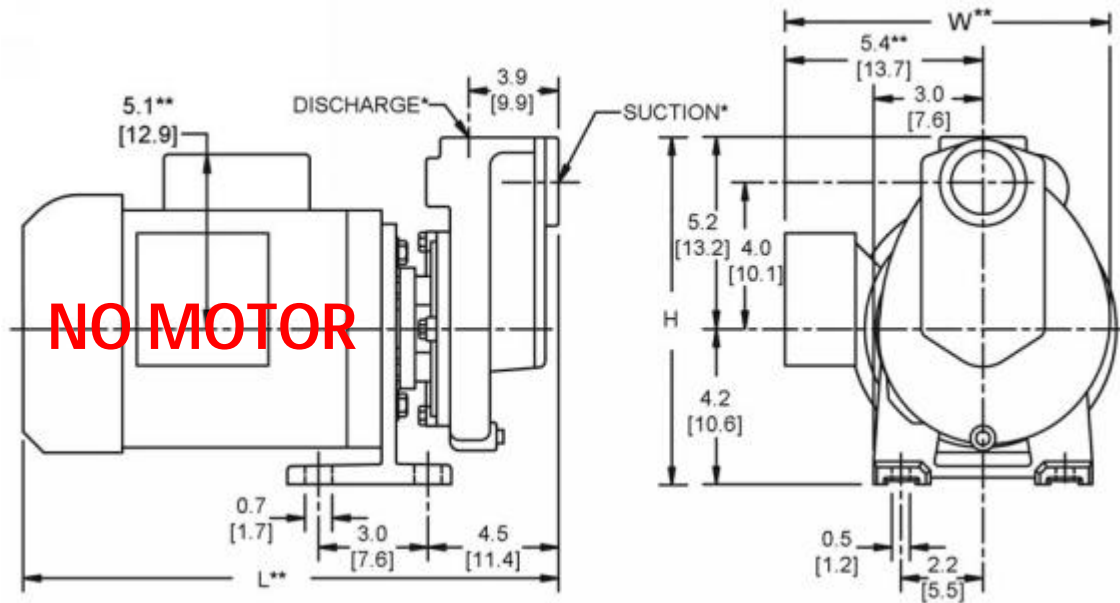

## Standard Features

- Bronze or Stainless Steel Construction with Stainless Steel Impeller
- Viton® or Teflon® Mechanical Seal and O-ring – Depending on Model
- 1-1/2" NPT Suction and Discharge Ports
- Maximum Temperature
  - ♦ Bronze 200° F
  - ♦ Stainless Steel 250° F
- Self-priming to 6 Ft.
- Maximum Working Pressure 75 PSI
- Self-cleaning, Semi-open Impeller
- Pedestal Models Feature Epoxy Coated Bearing Housing with 3/4" Diameter Stainless Steel Shaft with 3/16" Keyway and Sealed Ball Bearings
- Designed to handle liquids of specific gravities up to 1.3
- QSP – Quick Ship Pump for Many Models

Hazardous Duty/Xplosion Proof motors available from stock ranging from 1 to 10 HP; **CALL FOR QUOTATION & LEAD TIME!**