


Suction & Discharge Hose

- *PVC Reinforced Suction Hose with One Male & Female NPSH Connection; 1" to 6" Sizes*
- *PVC Flexible Discharge Hose with One Male & Female NPSH Connection; 1" to 6" Sizes*
- *1" & 2-1/2" Single Jacket Polyester Industrial High Pressure Fire Hose*
- *2" & 3" High Pressure or General Purpose Hose Kits*



PVC Reinforced Suction Hose

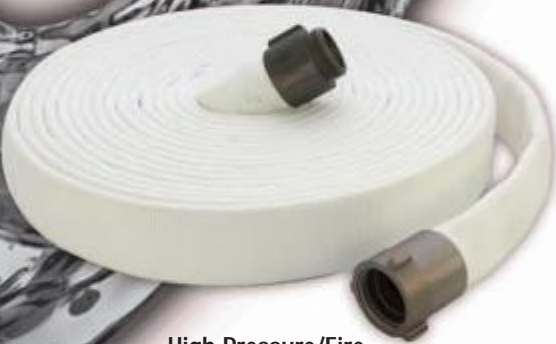

High Pressure/Fire Discharge Hose



Hose Kit



PVC Flexible Discharge Hose



HOSE SUCTION

| Part No. | PVC Reinforced Water Suction Hose | Ship Wt. (Lbs.) |
|----------------|--|-----------------|
| C222-90 | 1" x 15' PVC Water Suction Hose Assembly | 8 |
| C220-90 | 1-1/2" x 20' PVC Water Suction Hose Assembly | 10 |
| C221-90 | 2" x 20' PVC Water Suction Hose Assembly | 17 |
| C355-90 | 2-1/2" x 20' PVC Water Suction Hose Assembly | 24 |
| C356-90 | 3" x 20' PVC Water Suction Hose Assembly | 28 |
| C357-90 | 4" x 20' PVC Water Suction Hose Assembly | 38 |
| C354-90 | 6" x 20' PVC Water Suction Hose Assembly | 75 |

Water suction hose designed for construction, mining, marine and irrigation purposes. Construction: green, flexible, abrasion-resistant PVC with a rigid PVC reinforcement for full vacuum. Smooth Bore.

HOSE DISCHARGE

| PVC Water Discharge Hose Assembly Size | Part No. (25 Ft Length) | Ship Wt. (Lbs.) | Part No. (50 Ft. Length) | Ship Wt. (Lbs.) |
|--|-------------------------|-----------------|--------------------------|-----------------|
| 1-1/2" | C216-90 | 6 | C372-90 | 11 |
| 2" | C217-90 | 8 | C373-90 | 19 |
| 3" | C358-90 | 11 | C374-90 | 22 |
| 4" | C359-90 | 17 | C375-90 | 32 |
| 6" | C353-90 | 25 | C376-90 | 54 |

Designed for water discharge services. Durable, lightweight discharge hose that rolls up flat for easy storage. Construction: close woven nylon jacket impregnated with polyvinyl chloride. Mildew resistant.

HIGH PRESSURE FIRE HOSE

| Polyester Industrial High Pressure/ Fire Hose Assembly Size | Part No. (50 Ft Length) | Ship Wt. (Lbs.) |
|---|-------------------------|-----------------|
| 1" | C331-90 | 9 |
| 1-1/2" | C333-90 | 11 |
| 2" | C335-90 | 22 |
| 2-1/2" | C337-90 | 25 |

Designed for high pressure applications such as: fire fighting, fire protection and industrial washdown. Test pressure rating is suitable up to 300 PSI. Construction: Single jacket 100% polyester, ozone resistant tube and black SBR age resistant rubber tube that will not absorb moisture. **Aluminum Male x Female NPSH rocker lug couplings.**

*Fire hose nozzles & adjustable Spanner / Hydrant Wrench also available.

HOSE KITS

| Part No. | Hose Kits, Hose and Fittings | Ship Wt. (Lbs.) |
|---------------|--|-----------------|
| 55-362 | 2" General Purpose Hose Kit with 20 ft. 2" suction and 25 ft. 2" discharge hose and hose wrench. | 20 |
| 55-363 | 3" General Purpose Hose Kit with 20 ft. 3" suction and 25 ft. 3" lay flat discharge hose and hose wrench. | 20 |
| 55-338 | 2" High Pressure Hose Kit with 20 ft. 2" suction and 100 ft. 1-1/2" high pressure (100 PSI) discharge hose, (1) 1-1/2" fire nozzle, 1-1/2" x 2" adapter and hose wrench. | 38 |

All suction and discharge hose supplied with Male x Female NPSH couplings.

Female NPSH is compatible with Male NPT connection.

*Temperature Range:
10°F to 150°F*